


Part Number: UURECESSLP

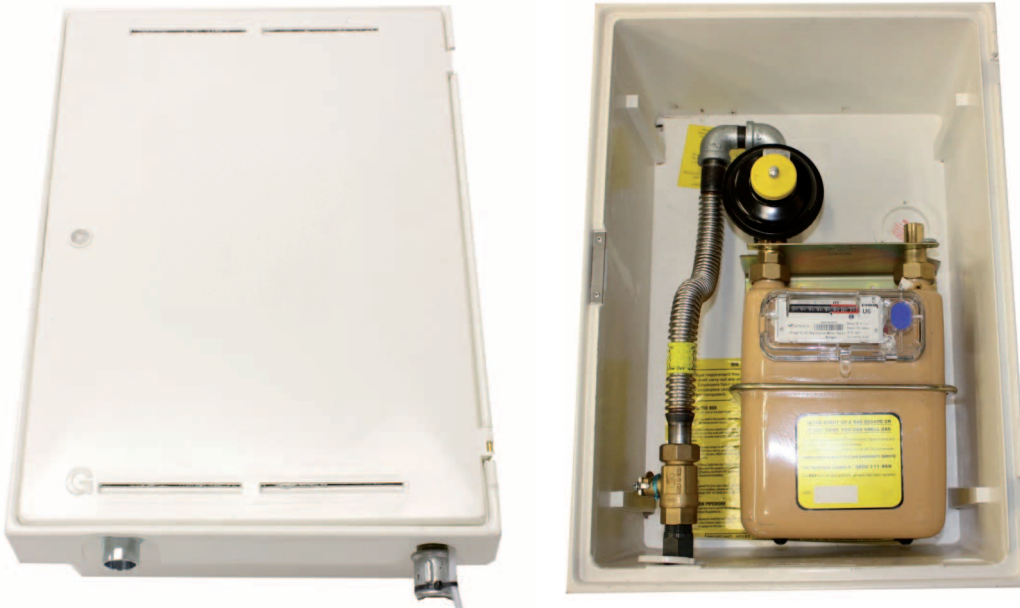

### Application

Our recessed meter box use our STB27-UPSO low pres-sure regulator. It provides a constant 37mbar through a G4 DTI Badged meter to exit on the right hand side with a capped meter union with 22mm plain copper connection for a soldered joint.

The box is made from chopped strand GRP which fully complies with the BS6400 -3 standard and with resis-tance to fire Class UL94HB (10). The door is hinged up-wards and the meter has an angled meter display to ease meter reading.

### Materials

- Meter Box Outer: Chopped Strand GRP
- Regulator Body and cover: zinc alloy (EN 1774)
- Regulator Diaphragm (reinforced), pads, gaskets: NBR (EN 549)
- Regulator Powder coat high resistance colour finish
- Meter to EN1359 : measuring to 6scm/hr with large , easy to read display
- Lever and butterfly handled valves to EN331 supplied with the box. The inlet valves comes complete with union for quick and easy meterbox removal

### Features

#### Connections

Inlet Connection: 25mm Wask Crimp Connector  
 Outlet Connection: 22mm Brass Solder Connection  
 Standard triangular meter box key to open the meter box.

#### Supply pressure

The meter box is able to withstand inlet pressures up to 150mbar (2 psig).

#### Regulated pressure

The module is tested and, where required, adjusted to give an outlet pressure of 37mbar.

*The content of this document is presented solely as information, as despite efforts to ensure its correctness, it should not be interpreted as an explicit or implicit cover guarantee for the products or services described or for their use or applicability. We reserve the right to change or improve product design or specifications at any moment and without notice.*

### Capacity

Typically 6scm/hr for LPG 3rd stage models (when using a minimum inlet pressure of 75mbar).

#### UPSO safety device

The Under Pressure Shut Off safety stops the gas flow when the regulated pressure is lower than a defined value (e.g. lack of supply pressure)  
 Visual indicator displays the open-close state.

#### Accessories

A full range of accessories are available for the meter box which are shown on the overleaf.


### Technical Information

Regulator	STB27-UPSO
Capacity kg/h (kW)	10.5 (155)
Set Pressure	37mbar
Inlet Pressure (from 2nd Stage)	75mbar (150mbar max)
UPSO Pressure	27-30mb
Design Standard	EN13785
Inlet connection	25mm WASK Crimp
Outlet connection	22mm Copper Tube



**The PE Connection Kit is designed to connect 25mm O/D PE gas pipe from below ground level to the caravan meter box.**

The meter box includes a 25mm Primofit transition fitting and isolating valve so the kit comprises a 25mm PVC 90 degree bend, and a 1m length of GRP sleeving. The GRP anti shear sleeve should be used to protect the pe pipe where it surfaces from below ground.

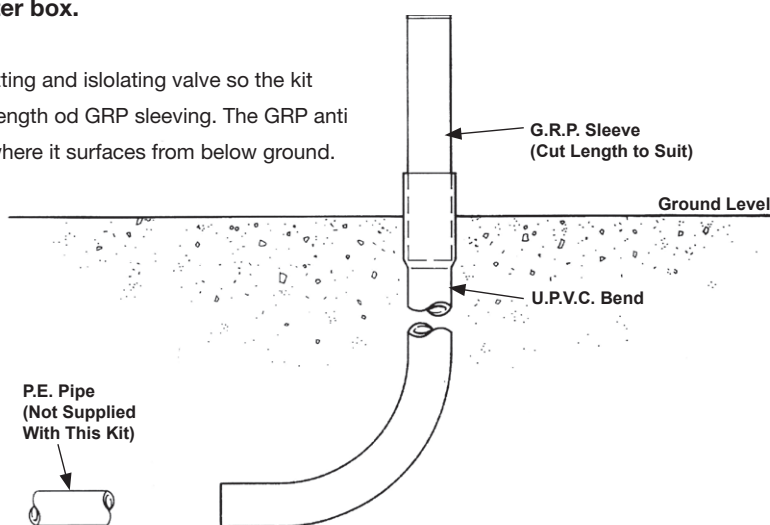

**Clesse UK also manufacture the standard surface mounted, recessed meter and caravan style boxes in both medium pressure and low pressure options. Please call for details.**

